

+

1/9  
FIG.1


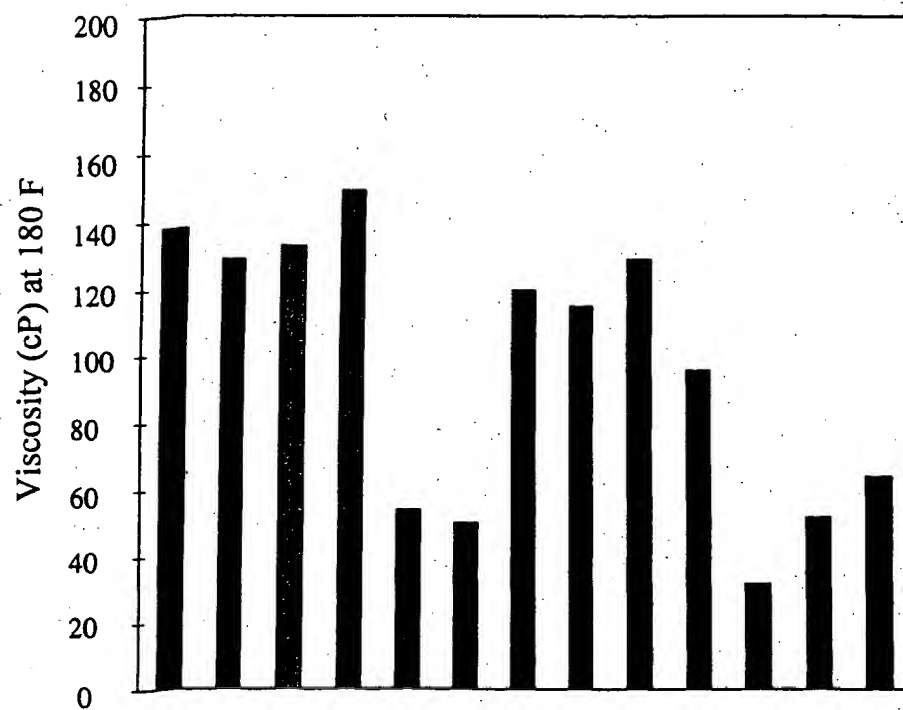


FIG.2

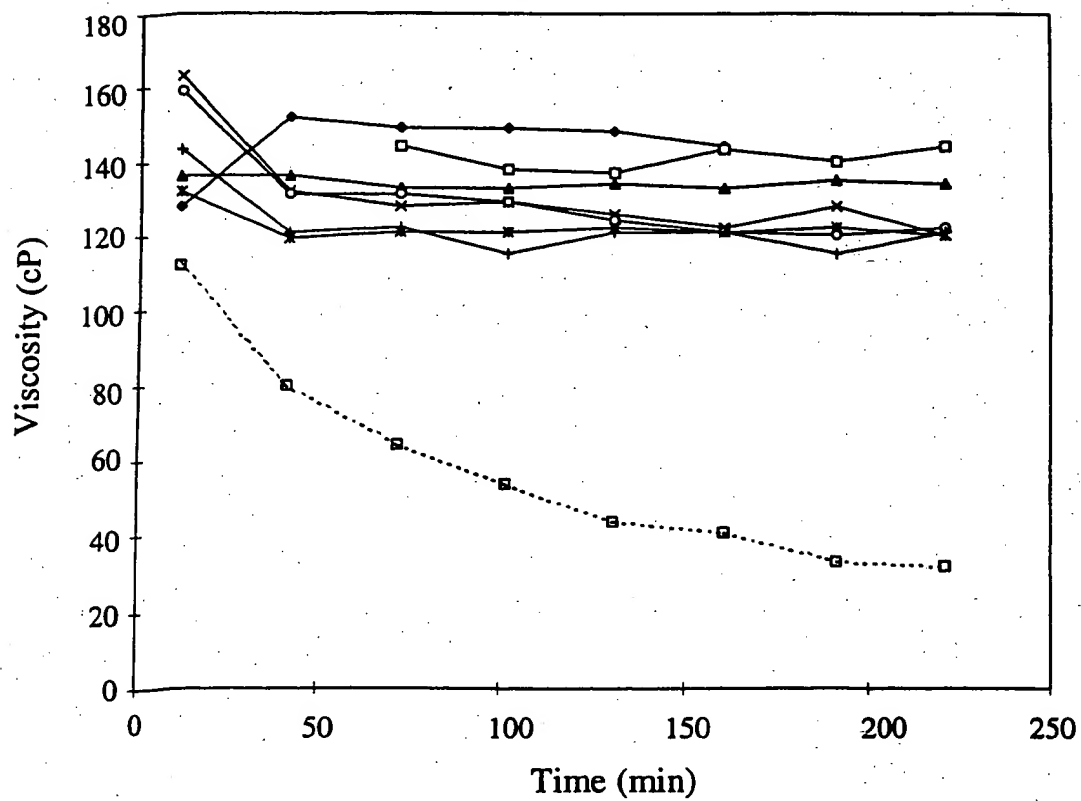

+

+

FIG.3


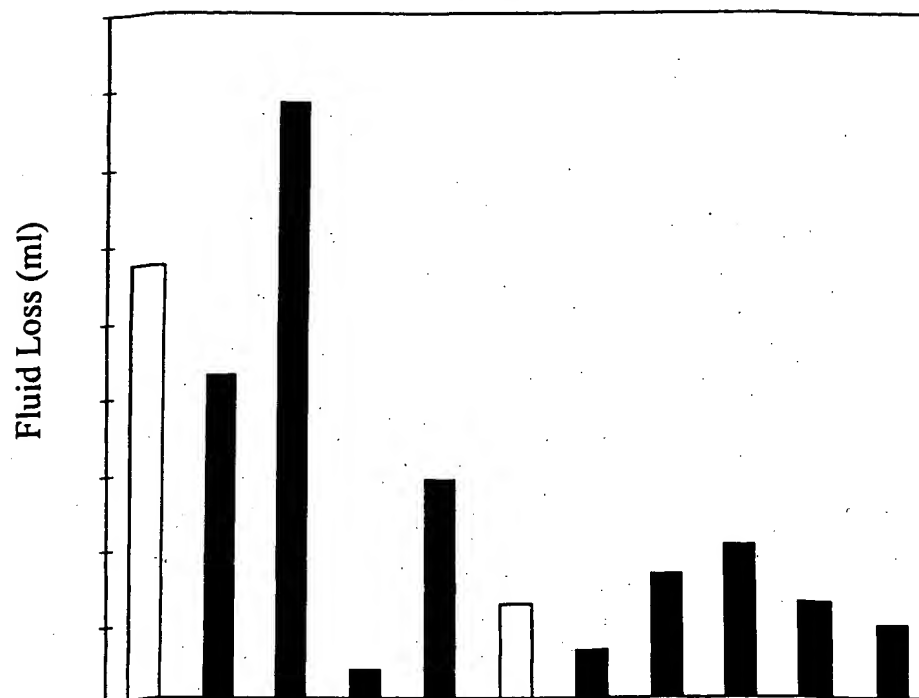


FIG.4

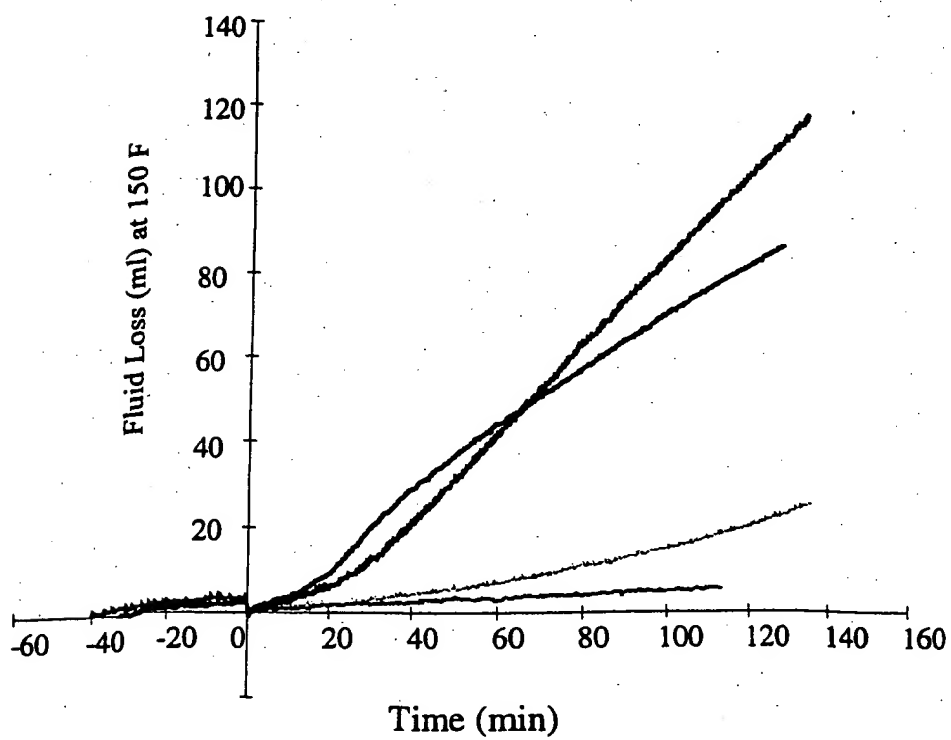

+

FIG.5


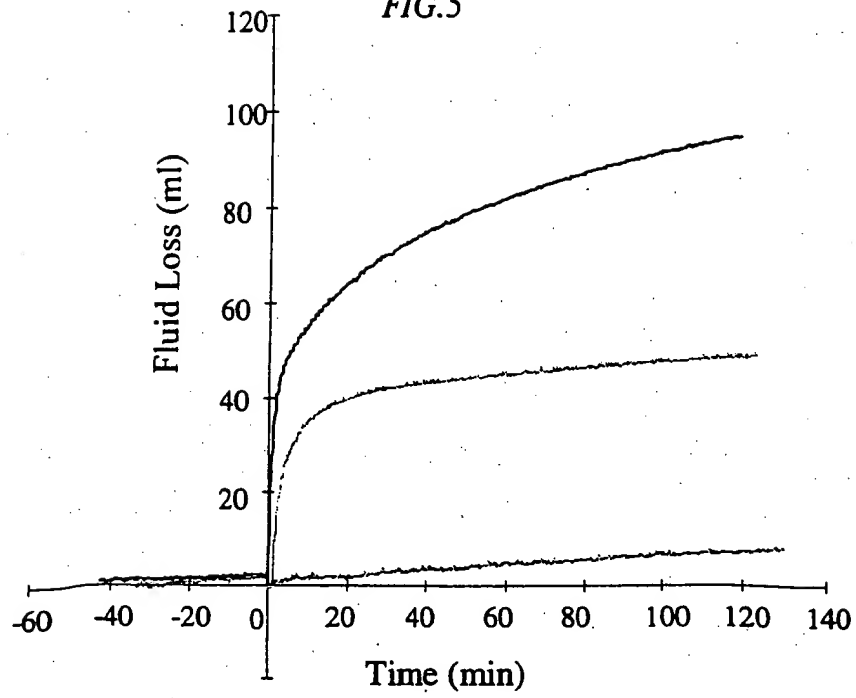


FIG.6

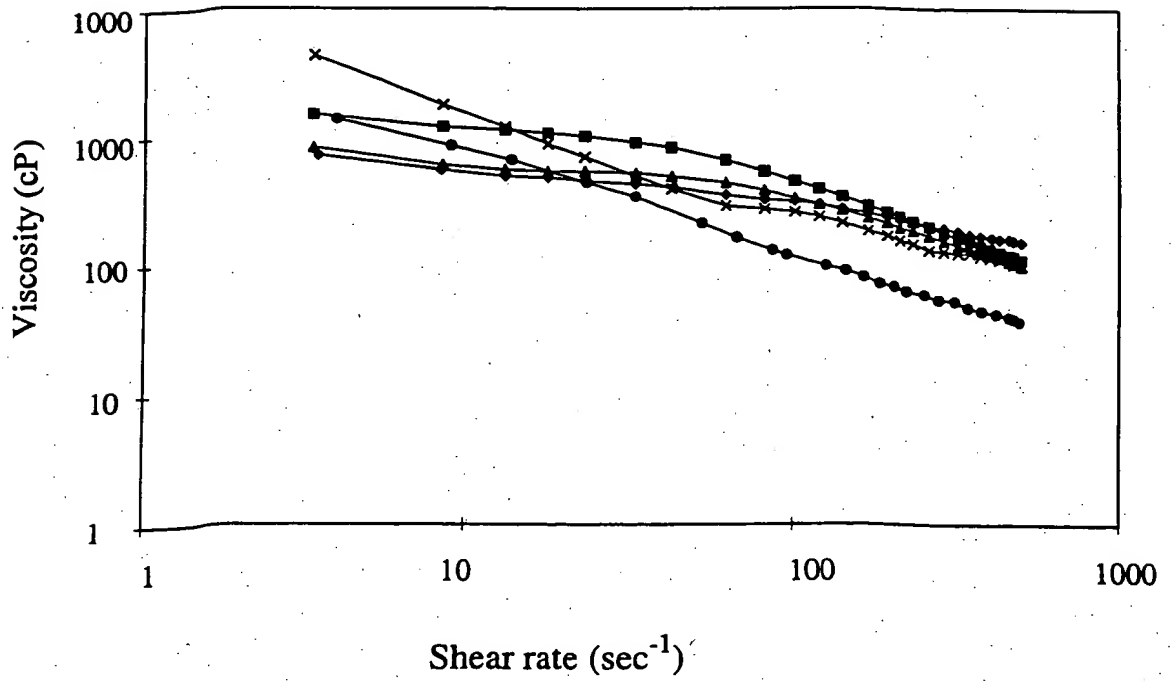

+

FIG.7


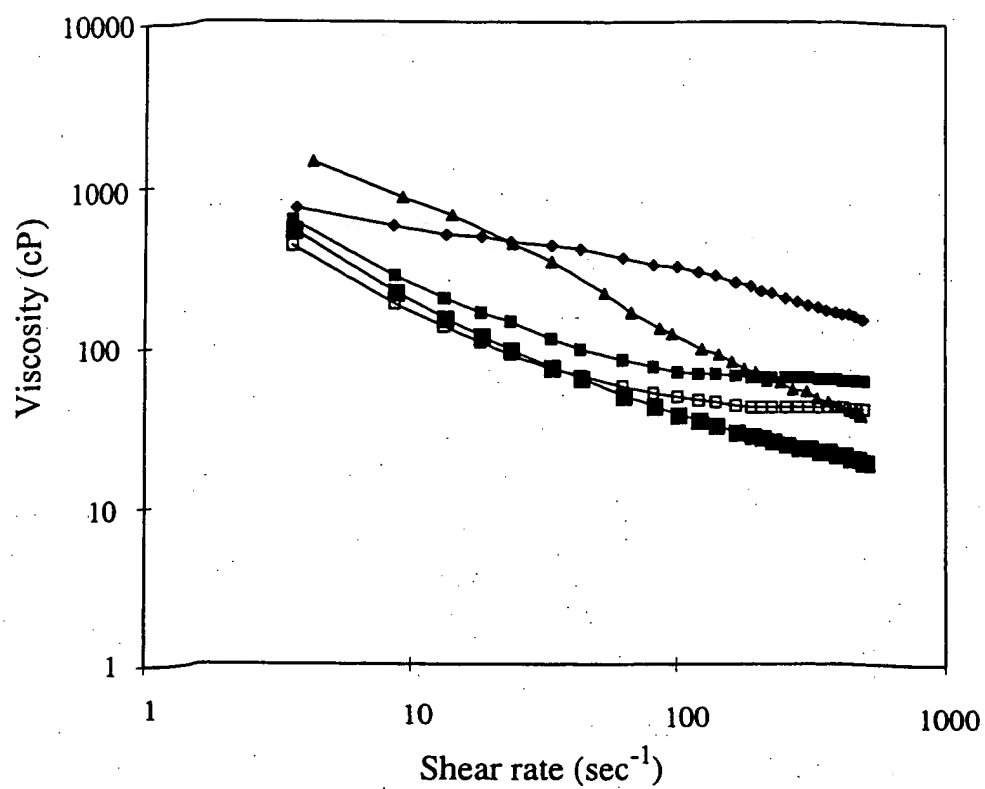


FIG.8

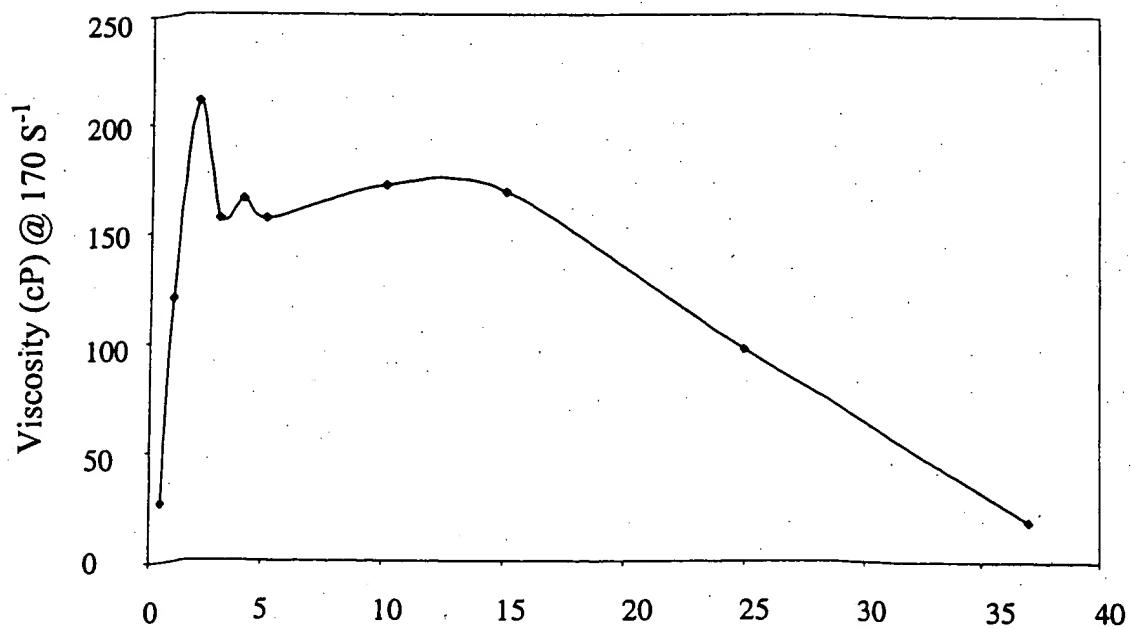

+

+

FIG.9


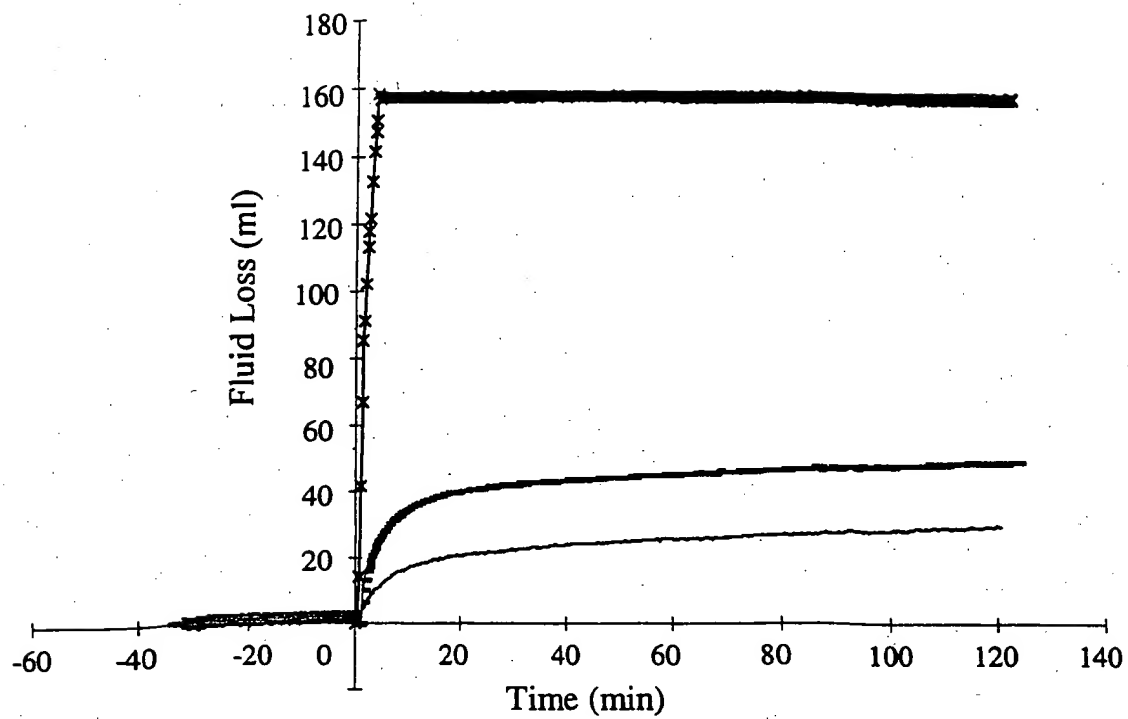


FIG.10

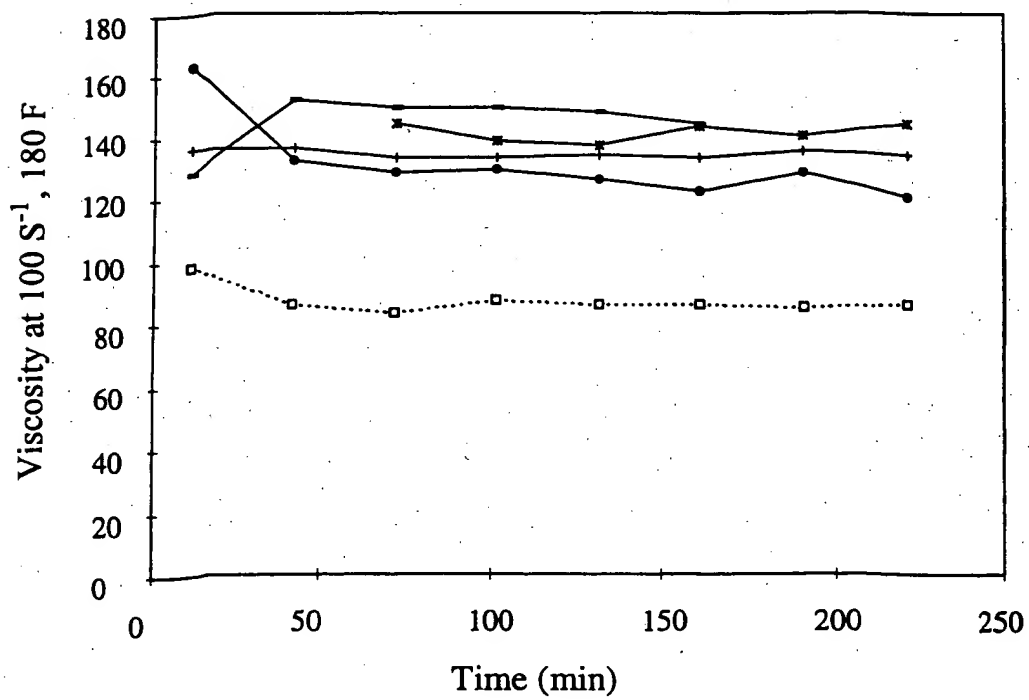

+

+

FIG.11


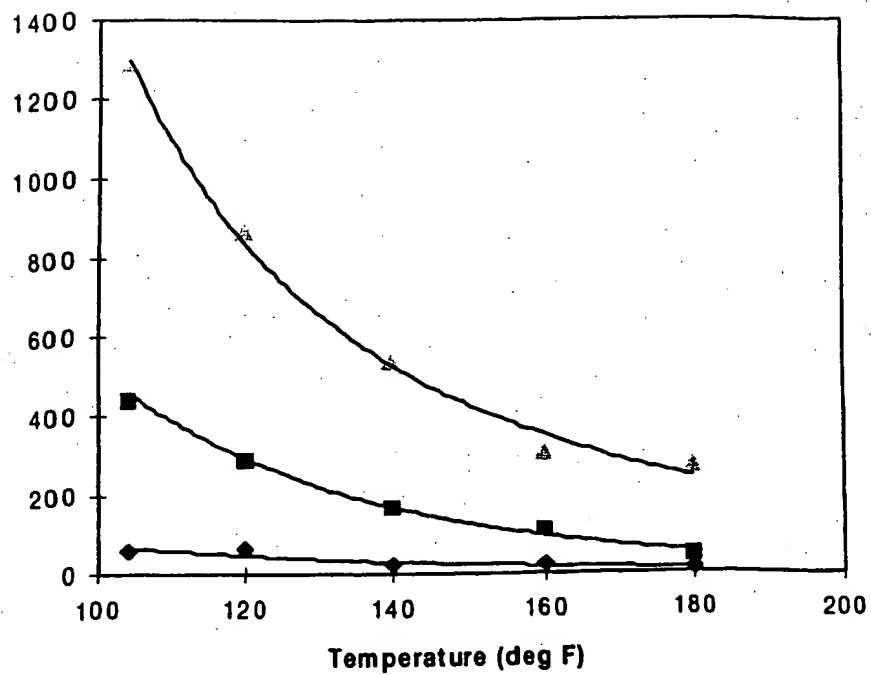


FIG.12

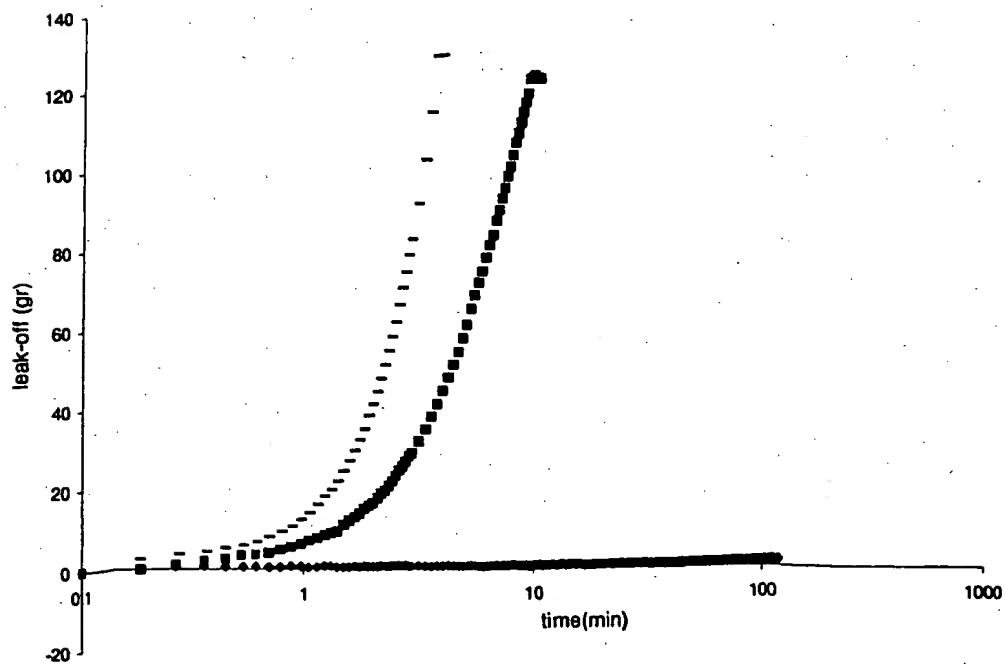

+

+

FIG.13

16 hour mud-off followed by soak fluid leak-off tests


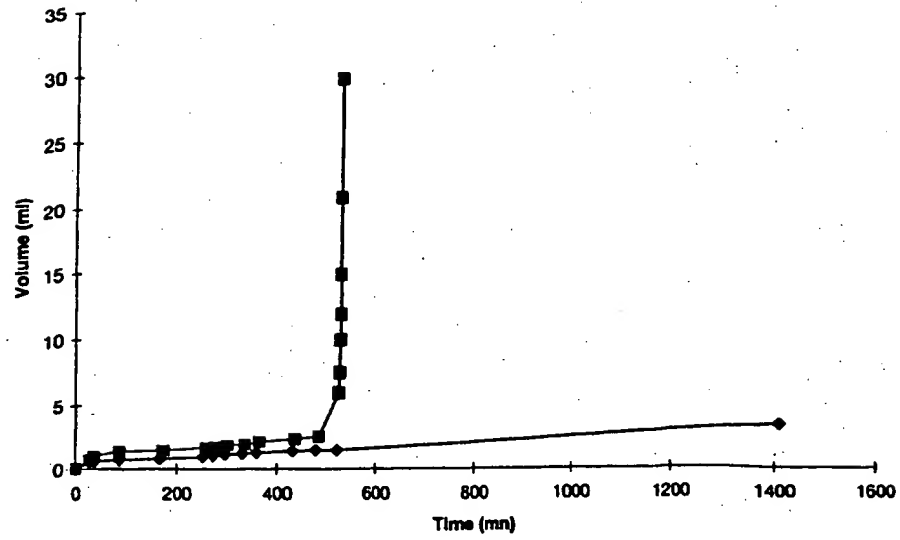


FIG.14

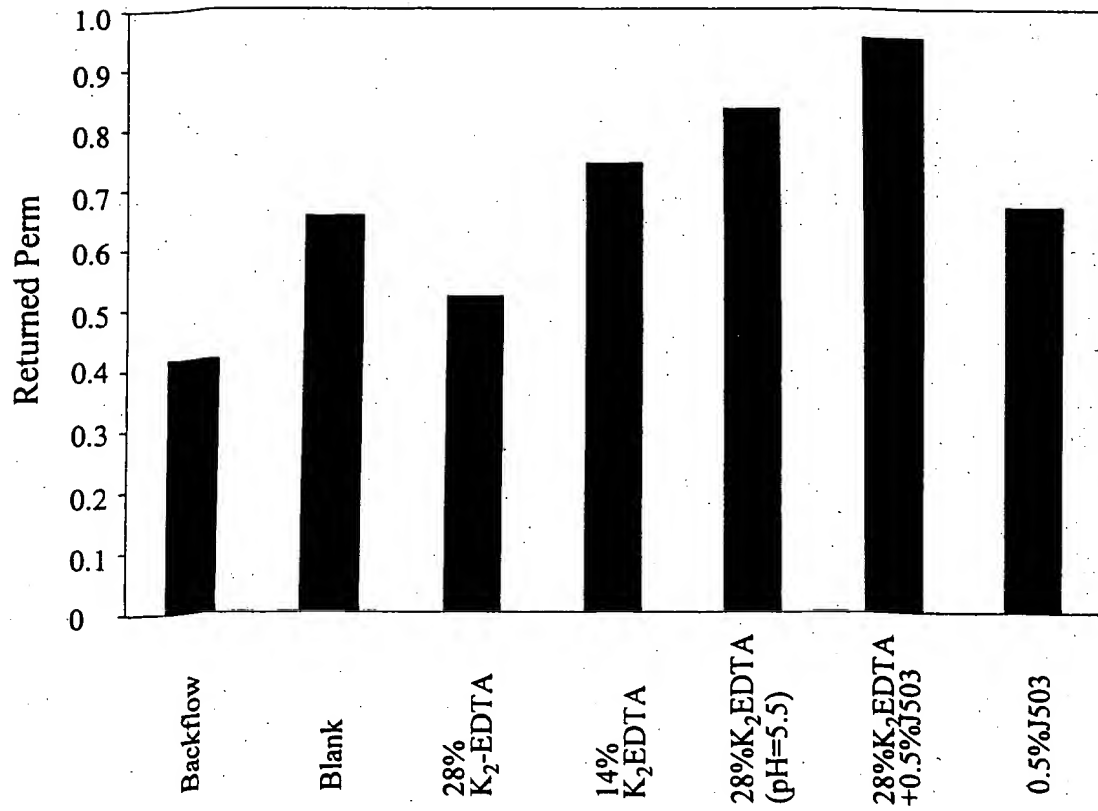

+

FIG. 15

# Breaker Treatments Applied to a Polymer Carbonate Drilling Fluid Filter Cake-150 F

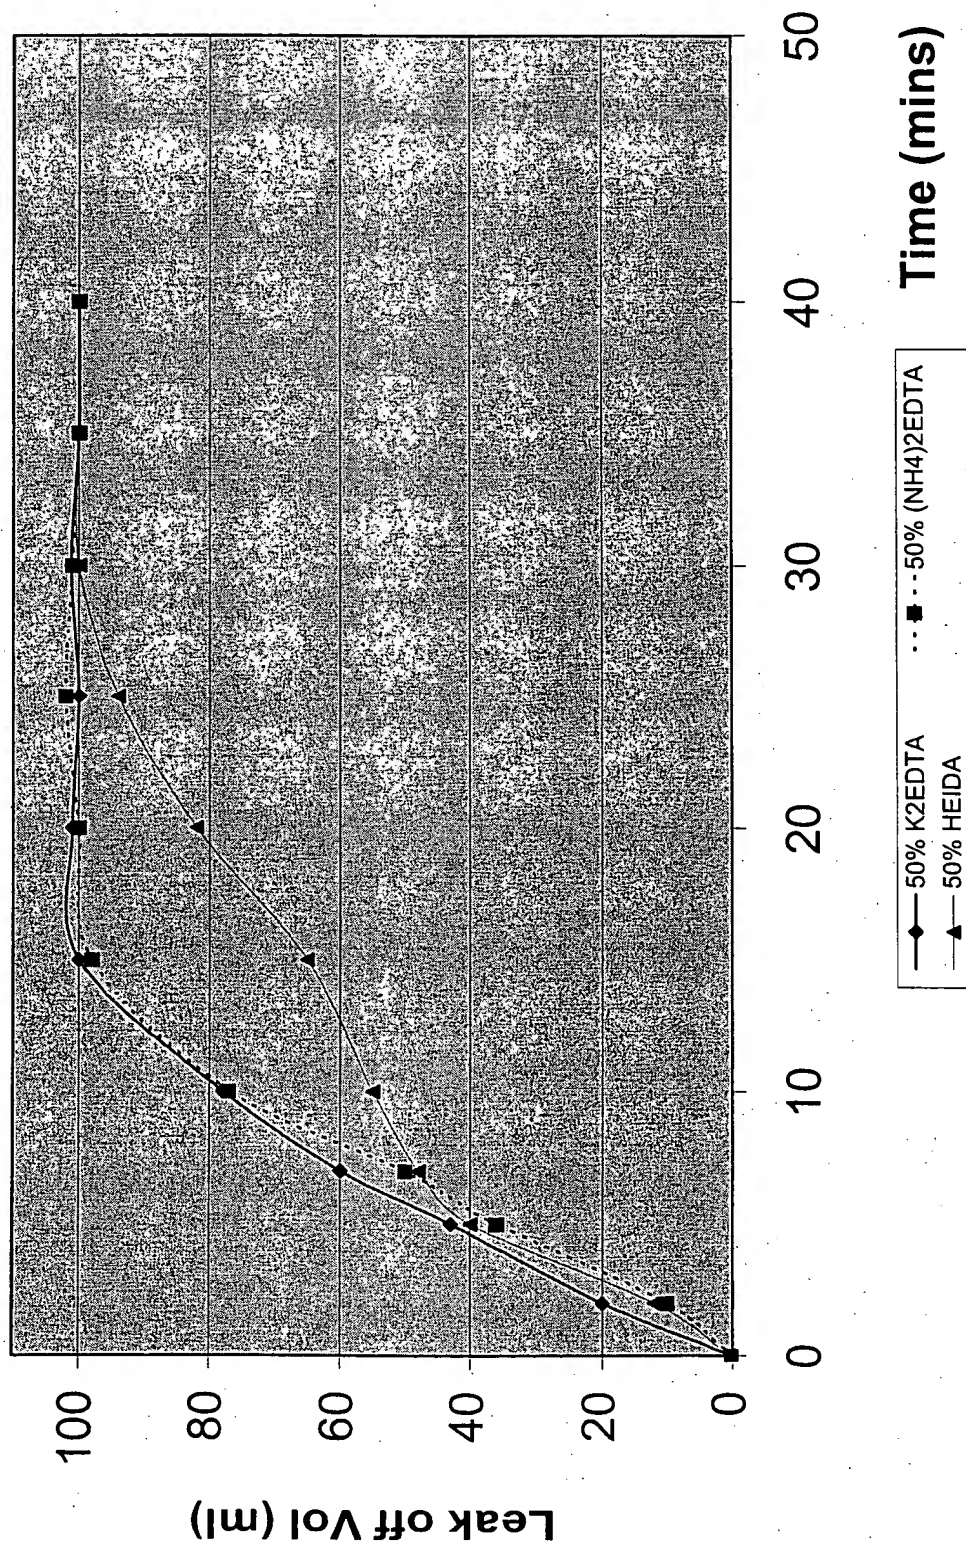




FIG. 16

